




QUOTATION NO.

PROJECT CODE:

DATE:

LOCATION:

CLIENT

S/N	DESCRIPTION	IMAGE REFERENCE	QTY	UNIT	PRICE	AMOUNT
1	Mobilization: Includes delivery to the site, site supervision and project management. Note: Building management fees and gate pass fees/permit will be care of directly by the client.		1	Ls	AED5	
2	JOINERY					
2.1	KITCHEN UNIT To supply and install custom U-shaped kitchen unit with island. All internal to be in EGGER STONE GREY finish and exposed panels to be in painted finish. All shutters/fronts to have recessed shark nose finger-pull profile handle. To have 100mm veneer finish skirting. Base Cabinets to have one (1) inner shelving and provision for stone top (to be separate), sink, cooker hob, dishwasher, electric sockets (by others). -To include two (2) narrow cabinet pull-out, one (1) cutlery tray, and one (1) magic corner. -Comprises nine (9) shutters, one (1) inner drawer, two (2) deep drawers. Tall Cabinets with provision for microwave, oven, built-in fridge/freezer. -To include one (1) tall pull-out larder, and LED lighting. Kitchen Island to have MRMDf substrate clad with stone (to be separate). Overhang depth: 600mm -Provision for countertop/seating side/waterfall edges to be clad with porcelain (to be separate). -To include one (1) waste bin pull-out, one (1) cutlery tray, and horizontal LED lighting under the seating side. -Comprises two (2) inner drawer, and four (4) deep drawers. To include concealed range hood enclosure above the cooker, MRMDf substrate clad with stone (to be separate), and two (2) horizontal open shelves at the Pantry side with LED lighting at the underside. Size in mm: Base Cabinet: (2330+4140+805) W x 600D x900H Concealed Range Hood: 1200 W x 510D x 1100 H Tall Cabinet : 1550 W x 600 D x 2500 H Island: 1800 W x 1200 D x 900 H Note: Excluding sanitary wares, wall skirting, supply & installation of stone (to be separate), plumbing and electrical works.	 	1	LS	AED65	
2.1.1	KITCHEN ISLAND & BASE COUNTERTOP STONE WORKS To supply, cutting, fabricate and install a custom ISLAND & BASE COUNTERTOP made of travertine porcelain (as per approved sample). Base countertop to have 30mm return edge. Island to have waterfall edges with 80mm return edge, seating side cladding to be included. Size in mm: Countertop: (2330+4140+805) W x 600 D Island: 1800 W x 1200 D x 900 H Note: Subject to final stone/tile selection Considered allowance for porcelain up to AED 520/SQM		1	LS	AED29	
2.1.2	KITCHEN WALL CLADDING STONE WORKS To supply, cutting, fabricate and install a custom wall cladding made of travertine porcelain. To include stone cladding on range hood enclosure. Size in mm: Wall: (2930+2700+400+2040+805) W x 1600H Concealed Range Hood: 1200 W x 510D x 1100 H Note: Subject to final stone/tile selection Considered allowance for marble up to AED 520/SQM		1	LS	AED23	


QUOTATION NO.

PROJECT CODE:

DATE:

LOCATION:

CLIENT

S/N	DESCRIPTION	IMAGE REFERENCE	QTY	UNIT	PRICE	AMOUNT
2.1.3	SMEG ELECTRIC COOKER SI2951D 90 CM W, 51.5 CM D Electric hob, Black		1	Nos	AED6,400.00	(RATE ONLY) FOR PROPOSAL
2.1.4	SIEMENS BUILT-IN MICROWAVE BE555LMS0M iQ500, built-in microwave, 60 x 40 cm, Stainless steel		1	Nos	AED2,300.00	(RATE ONLY) FOR PROPOSAL
1.4	SIEMENS MOUNTED COOKER HOOD Siemens Built In Hood iQ100, 60 cm, LI63TCA10M 60 x 30 x 17.5 (cm) Silver		1	Nos	AED1,470.00	(RATE ONLY) FOR PROPOSAL
2.1.6	SIEMENS BUILT-IN OVEN HB732G1B1M 60 CM iQ700, built-in oven, 60 x 60 cm, Black		1	Nos	AED5,300.00	(RATE ONLY) FOR PROPOSAL
2.1.7	SIEMENS BUILT IN FRIDGE / FREEZER K187VNSE0M iQ100, built-in fridge-freezer with freezer at bottom, 177.2 x 54.1 cm, sliding hinge		1	Nos	AED5,608.90	(RATE ONLY) FOR PROPOSAL
2.1.8	SIEMENS BUILT-IN DISHWASHER SN23HI25MM, iQ300 Home Connect Dishwasher 2400 W, 50.4 KG 60 W x 60 D x 84.5 H (cm)		1	Nos	AED2,420.00	(RATE ONLY) FOR PROPOSAL
					TOTAL COST	
					5% VAT	
					GRAND TOTAL	AED129

TERMS & CONDITIONS:

VALIDITY: 30 days from the date of this quotation

LEAD TIME: **Production Drawings:** 3 weeks from received payment
Production/Installation: 10 weeks from client approved production drawings, 100% sample material approval, considering all materials are readily available in the UAE and site readiness to install.

PAYMENT TERMS: 70% Advance Payment
20% Factory/ Installation Progress Payment
10% After Site Completion

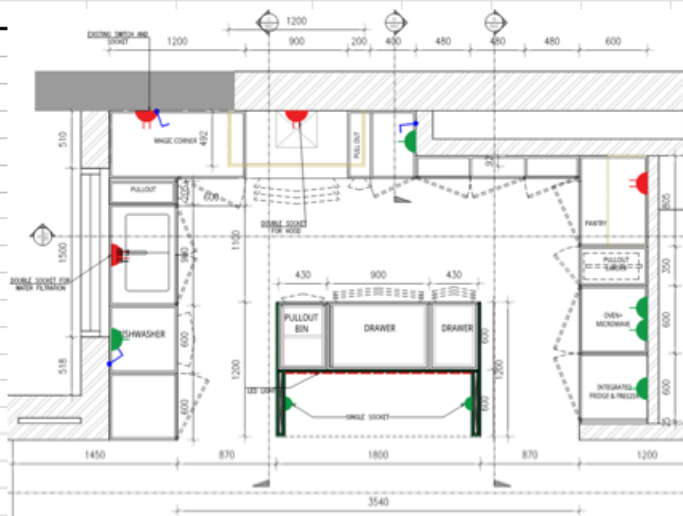
PROJECT NOTES:

Any items not mentioned in the BOQ is excluded from this offer.
Temporary facilities like water, power and toilet to be provided by client.
Joinery price is subject to final design and finishes approved by client.

KITCHEN UNIT
Size in mm:
Base Cabinet: (2300+4140+805) W x 600D x900H
Concealed Range Hood: 1200 W x 510D x 1100 H
Tall Cabinet : 1800 W x 600 D x 2500 H
Island: 1800 W x 1200 D x 900 H

MATERIALS	Remarks	QUANTITY	UNIT	PRICE/UNIT (AED)	TOTAL (AED)
MDF	1800x3600 shutters	5	BOARDS	20	
MDF	SKIRTING	1	BOARDS	20	
MFC	EGGER STONE GREY	23	BOARDS	38	
EDGE BAND		2	ROLL	25	
PAINT		35	M2	10	
VENEER		1.7	M2	10	
STAIN		1.2	M2	50	
LED STRIP		10	LM	50	
LED PROFILE		4	PC	14	
LED DRIVER		1	PC	50	
PUNTH		82.0	PC	20	
HINGE		41.0	PC	20	
DRAWER RUNNER	big drawers	6.0	SET	15	
FLAP-DOWN		1.0	SET	30	
MAGIC CORNER		1.0	SET	294	
PULL OUT BIN		1.0	SET	35	
PULL OUT LARDER		1.0	SET	137	
PULL OUT NARROW CABINET		2.0	SET	50	
CUTLERY		2.0	SET	61	
INNER DRAWER	LEGRABOX	3.0	SET	45	
SOLID WOOD- MERANTI	For framing (40x40mm,600mm space)	2	cb.ft	10	
Total Amount					
MATERIALS COST					
PAINT/VENEER CARPENTRY					
LABOR COST					
PRODUCTION COST					
INSTALLATION COST					
TOTAL COST					
% MATERIALS MARKUP					
% LABOR + INSTALLATION MARKUP					
% PROFIT MARGIN					
BOQ PRICE					

EG-U727-ST9-280x18	Stone Grey MFC board	2800 x 2070 x 18	pc
EG-U727-ST9-280x8	Stone Grey MFC board	2800 x 2070 x 8	pc
EG-E-U727S9-22x.8	ABS edgeband	22 x 0.8	lm
EG-E-U727S9-42x1.3	ABS edgeband	42 x 1.3	lm



FINISH	DOOR WIDTH	UNIT PRICE (ex. VAT)
Anthracite	450-600 mm	AED 2667
Veneer-Chrome	450-600 mm	AED 2667

NOVA SERIES		Aluminium	NOVA SERIES		
AKB.3050	Anthracite	Nova Series Seasoning Storage Basket With Aluminum and Steel Material W253 x D475 x H536mm- Anthracite	300mm	AED 224.00	AED 269.00
AKB.4050	Anthracite	Nova Series Seasoning Storage Basket With Aluminum and Steel Material W253 x D475 x H536mm- Anthracite	400mm	AED 266.00	AED 311.00
AKB.150	Anthracite	Nova Series Narrow Kitchen Basket With Aluminum and Steel Material W114-118x D493.5 x H510mm- Anthracite	150mm	AED 141.00	AED 170.00
AKB.200	Anthracite	Nova Series Narrow Kitchen Basket With Aluminum and Steel Material W164-168 X D493.5 x H510mm- Anthracite	200mm	AED 150.00	AED 180.00

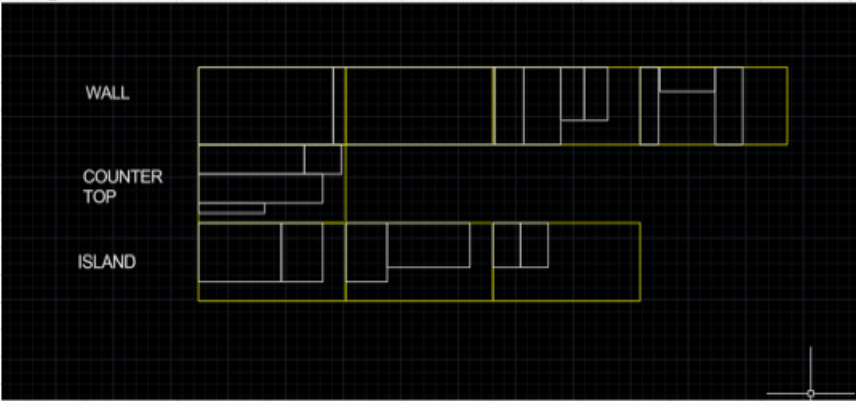


EuroArt Kitchen Accessories Std Price list Ex-Warehouse Dubai for UAE Market (In AED)					
EuroArt Ref No	Photo	Finish	Description	Cabinet Width (mm)	Project Price EXW EIW (IN AED)
Waste Bins					
EAT0500-13NS		White/Grey	Waste Bin With Soft Closing Slide 26L (2 x 13L) with 1st placement White/Grey	350 mm	AED 482.00
EAB.20A		White/Grey	Bottom Mounted Waste Bin With Normal Slide 40L (2 x 20L) White/Grey, Finish Chrome	350 mm	AED 265.00
EABW03AL		Silver	Door Mounted Waste Bin Auto sliding Lid 34L, Silver		AED 123.00
EABW03AL		Silver	Door Mounted Waste Bin Auto sliding Lid 3L, Silver		AED 96.00
WB.3030.500		Grey	EuroArt Trash Bins Abs+Ply Grey With Cover & With Undermount Soft Closing Slide W273mm,H465xH500xH500 Min 30L x 30L	60 mm	AED 365.00
WB.3030.600		Grey	EuroArt Trash Bins Abs+Ply Grey With Cover & With Undermount Soft Closing Slide W565xH500xH500 Min For 600mm Cabinet 30L x 30L	600 mm	AED 396.00
WB.1810.600		Grey	EuroArt Trash Bins Abs+Ply Grey With Cover & With Undermount Soft Closing Slide W573xH500xH500 Min 18L x 18L x 18L	600 mm	AED 580.00

KITCHEN COUNTERTOP +ISLAND STONE WORKS
Island: 1800 W x 1200 D x 900 H
Countertop: (2330+4140+805) W x 600 D

MATERIALS	Remarks	QUANTITY	UNIT	PRICE/UNIT (AED)	TOTAL (AED)
PORCELAIN	3200X1600	20.8656	M2	52	
CUTTING	KITCHEN ISLAND	47	LM	30	
FABRICATION		7.80	RM	350	
INSTALLATION		7.80	RM	350	
Total Amount					
MATERIALS COST					
VENEER/PAINT CARPENTRY					
LABOR COST					
PRODUCTION COST					
INSTALLATION COST					
TOTAL COST					
% MATERIALS MARKUP					
% LABOR + INSTALLATION MARKUP					
% PROFIT MARGIN					
BOQ PRICE					

Cutting List:



KITCHEN WALL CLADDING STONE WORKS
Wall: (2930+2700+400+2040+805) W x 1600H
Concealed Range Hood: 1200 W x 510D x 1100 H

MATERIALS	Remarks	QUANTITY	UNIT	PRICE/UNIT (AED)	TOTAL (AED)
PORCELAIN	3200X1600	20.8656	M2	52	
CUTTING	WALL CLADDING	57	LM	30	
FABRICATION		8.48	RM	350	
INSTALLATION		8.48	RM	350	
Total Amount					
MATERIALS COST					
VENEER/PAINT CARPENTRY					
LABOR COST					
PRODUCTION COST					
INSTALLATION COST					
TOTAL COST					
% MATERIALS MARKUP					
% LABOR + INSTALLATION MARKUP					
% PROFIT MARGIN					
BOQ PRICE					